


ADA

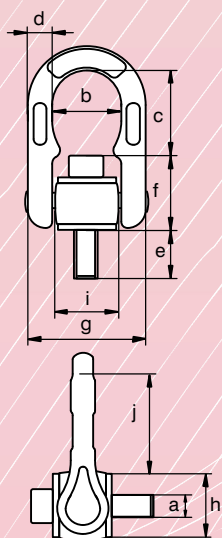

ADAUNC

EXCEL® Rotating hoist ring, grade 8

- **Material** : alloy steel, grade 8, quenched and tempered
- **Safety factor** : MBL equals 5 x WLL
- **Finish** : painted red
- **Temperature Range** : up to +250°C (482° Fahrenheit)
- **Certification** : at no extra charge this product can be supplied with a works certificate, a 3.1 certificate and/or EC Declaration of Conformity
- **Note** : WLL indicated hereunder are given in the worst conditions of use, i.e. 90°



part-number	working load limit	diameter thread	width inside	length inside	diameter	length	thickness base	width outside	diameter base	diameter base	length inside	Hex Key	Torque value	weight each
	t	a	b	c	d	e	f	g	h	i	j			
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	Nm	kg
ADA08	0.4	M 8 x 1.25	35	41	13	18	35	68	34	38	43	6	6.5	0.43
ADA10	0.7	M10 x 1.5	35	39	13	18	37	68	34	38	43	8	13	0.44
ADA12	1	M12 x 1.75	35	36	13	22	39	68	34	38	43	10	22	0.46
ADA14	1.3	M14 x 2.0	35	35	13	22	42	68	34	38	43	12	35	0.47
ADA16	1.6	M16 x 2.0	35	42	13	22	43	68	34	38	52	10	55	0.52
ADA18	2	M18 x 2.5	35	40	13	28	45	68	34	38	52	10	80	0.54
ADA20	2.5	M20 x 2.5	35	38	13	32	47	68	34	38	52	10	110	0.59
ADA22	3	M22 x 2.5	53	57	20	33	69	105	49	56	71	14	150	1.88
ADA24	4	M24 x 3.0	53	55	20	33	71	105	49	56	71	14	190	1.93
ADA27	5	M27 x 3.0	53	61	20	36	65	105	49	56	71	14	280	1.96
ADA30	6.3	M30 x 3.5	53	61	20	45	65	105	49	56	71	14	380	2.03
ADA33	7	M33 x 3.5	71	87	30	50	83	146	68	77	98	19	520	5.28
ADA36	10	M36 x 4.0	71	87	30	54	84	146	68	77	98	19	600	5.35
ADA39	10	M39 x 4.0	71	87	30	58	84	146	68	77	98	19	870	4.81
ADA42	12.5	M42 x 4.5	71	87	30	63	84	146	68	77	98	19	1000	5.56

EXCEL® Rotating hoist ring UNC, grade 8

- **Material** : alloy steel, grade 8, quenched and tempered
- **Safety factor** : MBL equals 5 x WLL
- **Finish** : painted red
- **Temperature Range** : up to +250°C (482° Fahrenheit)
- **Certification** : at no extra charge this product can be supplied with a works certificate, a 3.1 certificate and/or EC Declaration of Conformity
- **Note** : WLL indicated hereunder are given in the worst conditions of use, i.e. 90°



partnumber	working load limit	diameter thread	width inside	length inside	diameter	length	thickness base	width outside	diameter base	diameter base	length inside	Hex Key	Torque value	weight each
	t	a	b	c	d	e	f	g	h	i	j			
		inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	Nm	kg
ADA08UNC	0.4	5/16 - 18 UNC	35	41	13	18	35	68	34	38	43	6	6.5	0.43
ADA10UNC	0.6	3/8 - 16 UNC	35	39	13	18	37	68	34	38	43	8	13	0.44
ADA12UNC	1	1/2 - 13 UNC	35	36	13	22	39	68	34	38	43	10	22	0.46
ADA16UNC	1.7	5/8 - 11 UNC	35	42	13	22	43	68	34	38	52	10	55	0.52
ADA20UNC	2.5	3/4 - 10 UNC	35	38	13	32	47	68	34	38	52	10	110	0.59
ADA22UNC	3.5	7/8 - 9 UNC	53	57	20	33	69	105	49	56	71	14	150	1.88
ADA24UNC	4.5	1 - 8 UNC	53	55	20	33	71	105	49	56	71	14	190	1.93